




DISPENSERS

Pneumatic systems

AIR - PULSE CONCEPT

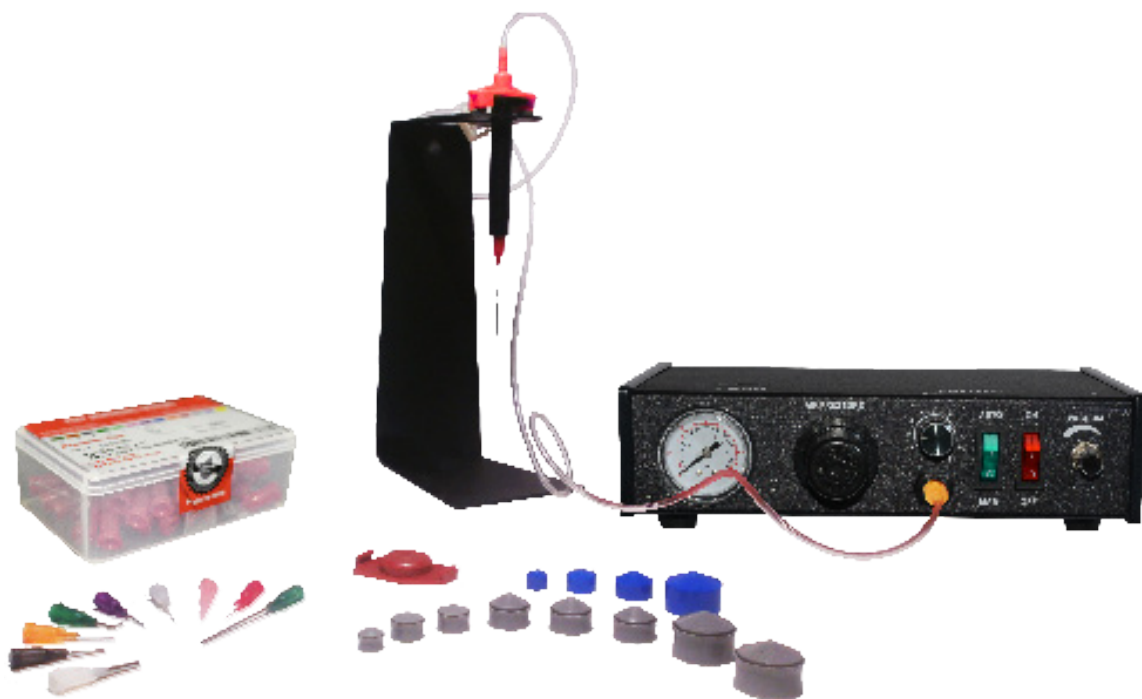

PRESENTATION

The electro-pneumatic dispensers are recommended for a consistent deposit of liquid products, fluids or pastes of any kind, and this repetitively and calibrated.

The universal dispensers Air-Pulse exist in version 0-1 Bar for very liquid products and in 0-7 Bar for any other product.

They are equipped with a precise adjustment to get a consistent debit of the product and an

adjustment of dispensing time from 0.01s to 60s.

In a syringe, a constant pressure during a given time, makes it possible to deliver repetitively a quantity of product by a simple impulsion on the pedal or the push button.

A venture system (vacuum) makes it possible to maintain the product in suspension in the syringe.

USE	7050	7150	7250	7350	100ETC
Thick paste	NA	++	++	++	++
Fluid to a liquid product	NA	++	++	++	++
Cyanoacrylate liquid	NA	+	+	+	+
Solder paste	NA	++	+	++	+
Bi-components	NA	++	++	++	++
Resins, charged products	NA	+	++	+	++
Micro dots	NA	++	++	++	++
Potting and filling	NA	+	+	+	+
Mixed and frozen product	NA	++	++	++	+


BASE CONTENT	7050	7150	7250	7350	100ETC
Foot pedal	++	++	++	++	++
Manual	++	++	++	++	++
Venturi	++	++	++	++	++
Mixer	NA	0	0	0	0
Needles kit	NA	++	++	++	++
Syringes and pistons kit	NA	++	++	++	++
Syringe adapter	NA	++	0	++	++
Regulating filter 5 microns	In option	0	0	0	0
Drying-regulating filter	In option	0	0	0	0
Holding system	++	NA	NA	NA	NA

AIR - PULSE : DISPENSER 7050 TO 7550

DISPENSER 7050 (PICK-UP)

The Pick-Up venturi systems are made in order to manipulate little pieces, small components, chips, etc. They are equipped with a vacuum-air valve which is electrically actioned with the pressure of the foot pedal.

FEATURES


Material	Industrial metal box	Pressure Display	Venturi adjustment
Models	1.33 - 7 Bars		
Dimensions	13.9 x 17.7 x 6.6 cm		
Weight	1.14 kg		
Control	Pedal		
Air entry	20 - 100 psi		
AC entry	110 or 220 VAC	Pressure adjustment	Pick-Up
Display	Pressure indicator		




DISPENSER PEDAL

Dispensers with pedal are built to dispense product quantities which are visible by the human eye. They deliver the fluid by a simple impulsion with the pedal which makes it able to reduce or prevent manual tiredness of the user.

FEATURES

Material	Metal and plastic	Command pedal	Venturi adjustment
Models	0 - 7 Bar		
Dimensions	25.7 x 14.2 x 13		
Weight	1.38 kg		
Control	Pedal		
Air entry	100 psi		
AC entry	No	Pressure display	Gun entry
Rate	NA		

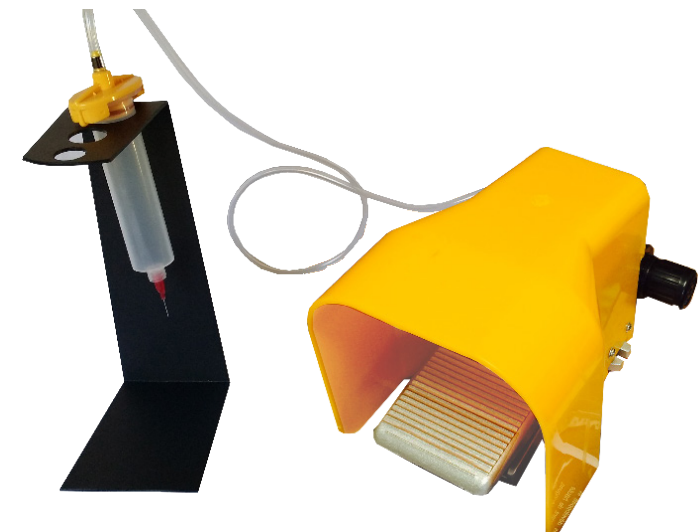

AIR - PULSE : DISPENSER 7050 TO 7550

DISPENSER 7250



The dispenser 7250 which only exists in 0-7 bar provides a time/pressure calibrated dispensing in more economic formats than the dispenser 7350 and is provided with a dispensing time in hundreds of seconds.

FEATURES

Manual/automatic	Pressure adjustment	Venture adjustment	Material	Industrial metallic box
Time adjustment	Pressure display	Gun Inlet	Models	0 - 7Bar
			Dimensions	21.9 x 15.1 x 6.7 cm
			Weight	1.82 kg
			Control	Pedal
			Air entry	7Bar
			AC entry	110 - 220 VAC
			Rate	500 cycles / minutes

DISPENSER 7150



The dispenser 7150 exists in 0-1 bar version for very liquid products and in 0-7 bar for other products. The dispensing is auctioned by a pedal as "the operator judgement".

FEATURES

Pressure display	Venturi adjustment	Material	Industrial metallic box
Pressure adjustment	Gun inlet	Models	0 - 7Bar and 0 - 1Bar
		Dimensions	27 x 14.8 x 6.8 cm
		Weight	1.38 kg
		Control	Finger and pedal
		Air entry	7Bar
		AC entry	110 - 220 VAC
		Rate	NA

AIR - PULSE : DISPENSER 7050 TO 7550

DISPENSER 7350

The calibrated time / pressure 7350 dispenser exists in version 0-1 bar, for highly liquid products, and 0-7 bar for other products. It is equipped by a MAC solenoid valve offering a constant flow rate and adjusting dispense time in hundreds of seconds.

FEATURES

Material	Industrial metallic box	
Models	0 - 7 Bar and 0 - 1 Bar	
Dimensions	21.9 x 15.1 x 6.7 cm	
Weight	2.01 kg	
Control	Finger and pedal	
Air entry	7Bar	
AC entry	110 - 220 VAC	
Rate	More than 600 cycles/min	



DISPENSER 100ETC

The 100ETC dispenser (digital) calibrated time / pressure exist in 0-1 bar and 0-7 bar. Equipped by a MAC solenoid valve offering a constant flow rate and adjusting dispense time in hundreds of seconds.

FEATURES

Material	Industrial metallic box	
Screen	LED	
Models	0 - 7 Bar et 0 - 1 Bar	
Dimensions	21.9 x 15.1 x 6.7 cm	
Weight	1.68 kg	
Control	Finger and pedal	
Air entry	0 - 100 psi et 0 - 15 psi	
Cadences	More than 600 cycles/min	



AIR - PULSE : DISPENSER 7050 TO 7550



DISPENSER 7550

A dispenser and a Pick-Up in one. The dispenser 7550 time/pressure calibrated exists in 0-1 bar and in 0-7 bar. With its MAC solenoid valve, the dispenser makes it possible to dispense with accuracy very little quantities of products and simultaneously, it enables a movement of little pieces by aspiration (like the Pick-Up dispenser).

This double function enables you to gain time, money and place. They are delivered with a kit of starter consumables as well as an input pen.

■ Dispensing

The first function of the PDS7550 is the dispense of fluids thanks to the application of a consistent pressure during a time laps. It delivers repetitively a quantity of product by the simple impulsion of a push-button or a pedal.

■ Pick - Up

The dispenser 7550 has also a venture system which enables to maintain a small item in suspension at the top of the gun. By one easy action of the manual command or pedal, the system aspires. Once in position, you simply have to release the command to liberate the item.

FEATURES



Material	Industrial metallic box
Models	0 - 7Bar et 0 - 1Bar
Dimensions	25.7 x 12.7 x 6.7 cm
Weight	1,68kg
Control	Finger and pedal
Air entry	7Bar
AC entry	110 - 220 VAC
Rate	More than 600 cycles / minutes

AIR - PULSE : ACCESSORIES

SYRINGE SUPPORTS

A handy and stable support which enables to hold the syringes.




FINGER SWITCH

The finger switch replaces the pedal which is directly connected to the dispenser.



TRAP FILTER

A trap filter for the syringe adapter which prevents the fluid to move back up in the dispenser.



NEEDLES KIT

A selection of 50 PosiDot needles for the Air - Pulse dispenser. Possibility of a bulk packaging to get a bigger quantity.




FILTER REGULATOR

The regulator is equipped with a drying filter which purifies air. It is recommended for dispensing cyanoacrylate.



Many other accessories and consumables are available on : www.polydispensing.com

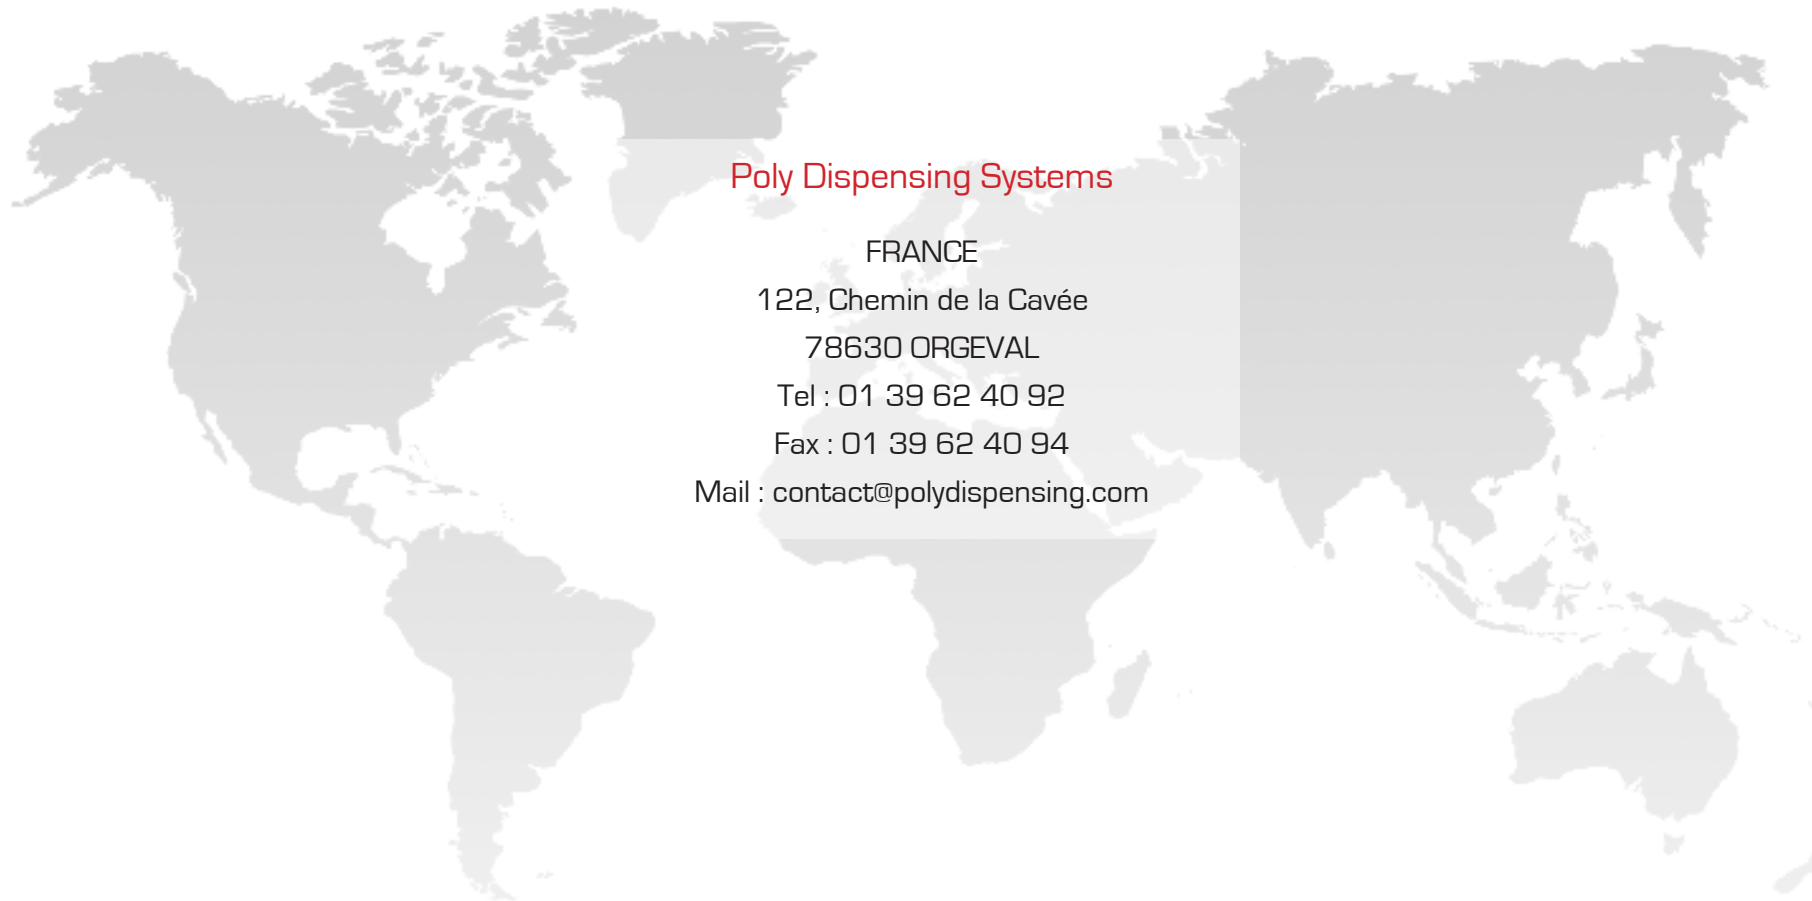

Poly Dispensing Systems

FRANCE

122, Chemin de la Cavée

78630 ORGEVAL

Tel : 01 39 62 40 92

Fax : 01 39 62 40 94

Mail : contact@polydispensing.com

The fluid dispensing being the cornerstone of numerous production chains, PDS emphasis on this specific need by proposing a wide range of innovative and efficient dispensing equipments.

French leader on this area, it specialty is to design and implement solutions to put down and dispense every type of fluid in an accurate and repeatable way during the process of assembly. Thanks to it vast field of activity and application, no doubt that PDS will know how to resolve your most complex problems of deposit and brings you the suited recommendations to optimize your production's capacities.

Persuaded that our expertise must be complete, we also supply you tools in order to prepare your fluid (mixture and degassing) and polymerize your glues (UV sunstroke). Our range of consumables (needles, syringes, static mixers etc are also considered as the best in the market.

So we provide you every type of dispensing equipments to allow you to use efficiently your fluids regardless of the viscosity : glues, greases, lubricants, pastes, solvents, silicones, inks, activators, RTV, paints.

Present in more than 20 countries in the world, performance, quality, service and technology are at the center of all our concerns.